

Classical Mechanics
Phy 235, Lecture 06.

Frank L. H. Wolfs
Department of Physics and Astronomy
University of Rochester

Frank L. H. Wolfs Department of Physics and Astronomy, University of Rochester, Slide 1

1

KLM 642 from JFK landing at Schiphol.



Frank L. H. Wolfs Department of Physics and Astronomy, University of Rochester, Slide 2

2

A few remarks ...

- Midterm exam # 1:
 - Next week on Tuesday 9/23, 8.00 – 9.20 am, B&L 109:
 - Chapters 1 – 4.
 - Equation sheet will be provided.
- Exam material will be reviewed on Wednesday 9/17 during lecture.
- There will be extra office hours next week on Monday 9/22.
- There will be:
 - No office hours on Wednesday 9/24 and Thursday 9/25.
 - No recitations on Tuesday 9/23 and Thursday 9/25.
 - No regular homework due on Friday 9/26. But the extra credit homework is due on that day.

Frank L. H. Wolfs Department of Physics and Astronomy, University of Rochester, Slide 3

3

Chaos.

Simple systems can be chaotic.

<http://www.glowscript.org/#/user/wolfs/folder/Public/program/DoublePendulum>

Frank L. H. Wolfs Department of Physics and Astronomy, University of Rochester, Slide 4

4

Chaos.

- Consider a simple driven pendulum.
- The motion of the driven pendulum can be written as

$$\ddot{\theta} = -\frac{b}{ml^2}\dot{\theta} - \frac{g}{l}\sin(\theta) + \frac{N_d}{ml^2}\cos(\omega t)$$

- Even when the driving force is a harmonic driving force, the resulting motion may be chaotic.
- How do we identify chaos?
- All will be revealed today.

Frank L. H. Wolfs Department of Physics and Astronomy, University of Rochester, Slide 5

5

Studying the solution with Mathematica.

```

(* Set the values of the various parameters *)
c = 0.2;
w = 0.694;
F = 0.52;
pi = N[Pi];
cycles = 50;
steps = 30;

(* Solve the differential equations with the given set of initial conditions. *)
sol = NDSolve[
  {x'[t] == v[t],
   v'[t] == -c*v[t] - 5*Sin[x[t]] + F*Cos[w*t]},
  {x[0] == 0.8,
   v[0] == 0.8},
  {x, v}, {t, 0, (cycles*(2*Pi)/w)}, MaxSteps -> 20000];

(* Create a function "reduce" that translate all angles back to the region between -Pi and +Pi *)
reduce[x_] := Mod[x, 2*Pi] /; Mod[x, 2*Pi] <= Pi;
reduce[x_] := (Mod[x, 2*Pi] - 2*Pi) /; Mod[x, 2*Pi] > Pi;
  
```

Initial parameters.

Diff. equation.

Boundary conditions (x and v at t = 0).

Mod function returns the result of the remainder of the division by 2π.

Note: "lhs := rhs /; test". Use this definition only if test = True.

Frank L. H. Wolfs Department of Physics and Astronomy, University of Rochester, Slide 6

6

Logistic equations. Creating chaos with maps.

- Assume the position parameter of a system at time t_{N+1} , x_{N+1} , depends on the value of the position at time t_N :

$$x_{N+1} = \alpha x_N (1 - x_N) = f(\alpha, x_N)$$
- For certain values of α , the system will evolve towards a stable equilibrium. For other starting values, the system may evolve towards more than one possible solution.

Frank L. H. Wolfs Department of Physics and Astronomy, University of Rochester, Slide 10

10

Logistic equations. Creating chaos with maps.

Frank L. H. Wolfs Department of Physics and Astronomy, University of Rochester, Slide 11

11


Logistic Maps

- Using tools such as VPython, it is easy to explore logistic maps.
- Let us have a look:


https://www.glowscript.org/#/user/wolfs/folder/Public/program/PHY23_5-LogisticMaps

Frank L. H. Wolfs Department of Physics and Astronomy, University of Rochester, Slide 12


12

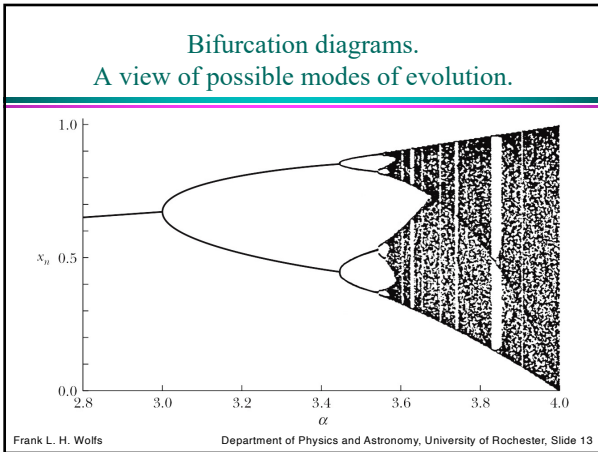

13

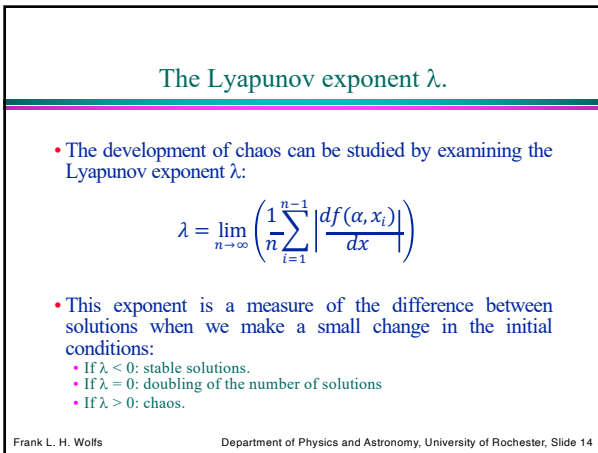

14

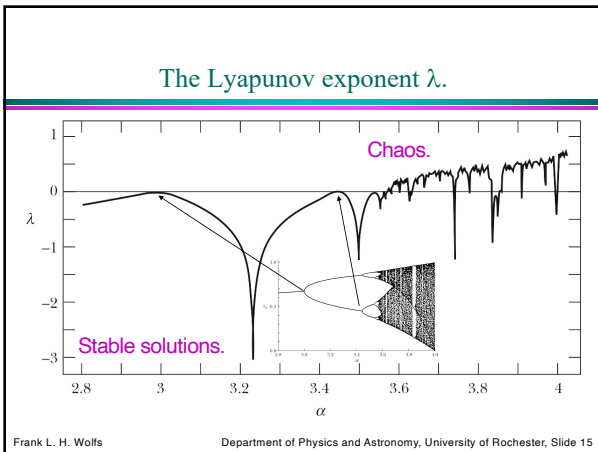

15

This completes the material that is going to be covered on Midterm Exam # 1.

Frank L. H. Wolfs Department of Physics and Astronomy, University of Rochester, Slide 16

16

ENOUGH FOR TODAY?

Frank L. H. Wolfs Department of Physics and Astronomy, University of Rochester, Slide 17

17
